


Storz Blanking Caps

Available to suit all Couplings and Adaptors. Supplied with chain as standard.

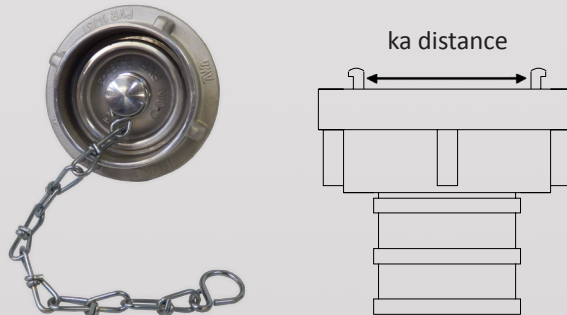

Material Options

Light Alloy
Brass
Stainless Steel
Polypropylene

Gun Metal
Anodised
Colour coded paint finish for special projects



Locking Devices

For additional security the adaptors can be fitted with a locking facility as an additional safeguard. A keylock version is also available upon request.



Drain Valve option

Manual drain valve
Auto air bleed for use on pipework.



Polypropylene Caps

With or without handle for use in non-pressurised applications.




Instantaneous Caps & Plugs

To BS336 and FETA standard (16 Bar)

Blank caps and plugs are used to seal off hoses and pipework to prevent ingress of dust, insects and other foreign matter. They are available to suit both the 64mm and 38mm Instantaneous coupling sizes. Supplied with keep chains as standard.

Inst Caps:

Single twist release as standard. Supplied with keep chain. Aluminium or Gun Metal.

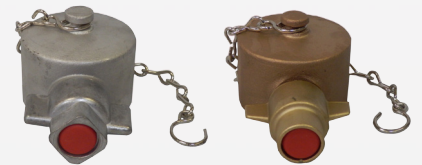

Inst Plugs:

Aluminium or Gun Metal also available in plastic in 64mm.



Rubber Caps and Plugs

64mm size only
(Rubber caps and plugs are a push fit and do not have any form.)



Inst Vented Caps

Single Twist release as standard. With additional pressure relief vent and Nickel plated Brass chain.



Inst Pressure Gauge Plug

Dry or Glycerine filled 80mm (3") gauge with Rubber Boot.
Gun Metal static assembly used to take static pressure at the hydrant standpipe outlet.

Dry Gauge: 14 bar as standard.
16 bar on request.
Glycerine Gauge: up to 30 bar.

