


Hose Coupling Cuff

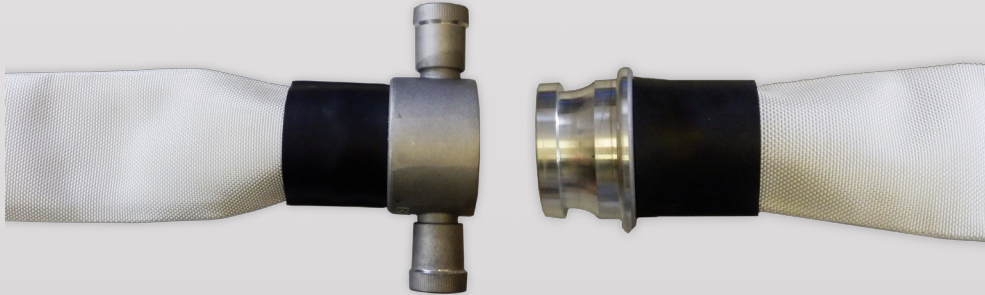

Characteristics

- Extends beyond the coupling tail reducing impact damage when the hose is dropped or dragged
- Fits tightly behind the coupling collar preventing ingress and build up of mud between the coupling and hose
- Manufactured in high quality synthetic rubber
- 4 mm wall thickness provides resistance to impact damages
- Prevents potential hand injuries during coupling connection

Standard Diameter
mm
38
42
45
52
64
70
75