


# Hose Vulcaniser

PRONTO P 10

Vulcaniser for the repair of layflat delivery hoses

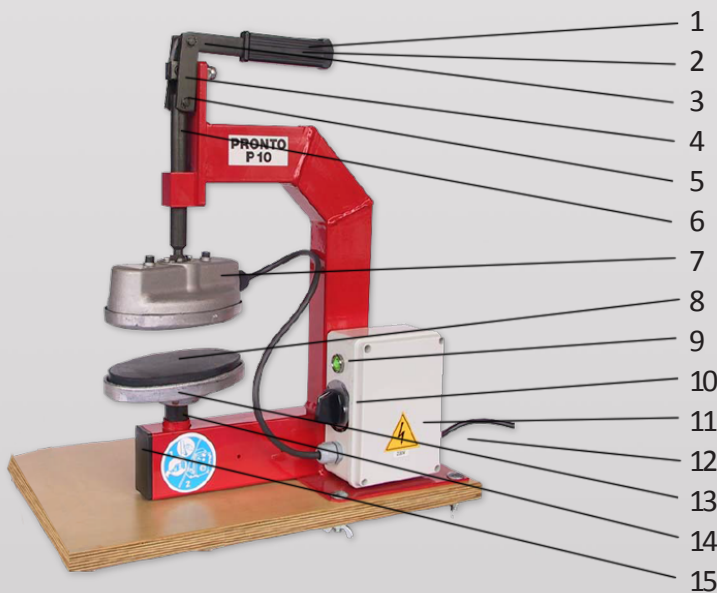

**Pronto with hose**

### Characteristics

- For the repair of layflat delivery hoses with external patches
- Suitable for uncoated, PU-coated and covered fire hoses
- The movable support gives a uniform pressure during the vulcanisation process
- Timer controls the vulcanisation time up to 15 minutes
- Automatic temperature control prevents overheating

### Parts

|    |                    |
|----|--------------------|
| 1  | Lever handle       |
| 2  | Clamping lever     |
| 3  | Connection rod pin |
| 4  | Connection rod     |
| 5  | Pin circlip        |
| 6  | Tie rod            |
| 7  | Heating unit       |
| 8  | Rubber pad         |
| 9  | Warning Light      |
| 10 | Timer              |
| 11 | Switcher           |
| 12 | Connection cable   |
| 13 | Support Unit       |
| 14 | Spring             |
| 15 | Front cover        |

### Technical Specification

|                     |   |
|---------------------|---|
| Voltage (AC)        | 230V-50/60 HZ                           |
| Power               | 600W                                    |
| Temperature Range   | 135-160 °C                              |
| Timer up to 60 min. | bis 60 min                              |
| Packing Dimensions  | 420x210x560 mm (width x depth x height) |
| Weight              | 7.5kg                                   |
| Heating Unit size   | 175x100mm                               |
| CE- Conformity      | EN 292-2-1992/ EN 60204-1-1993          |