


## Landing Valves

Constructed in accordance with BS5041 Part 1

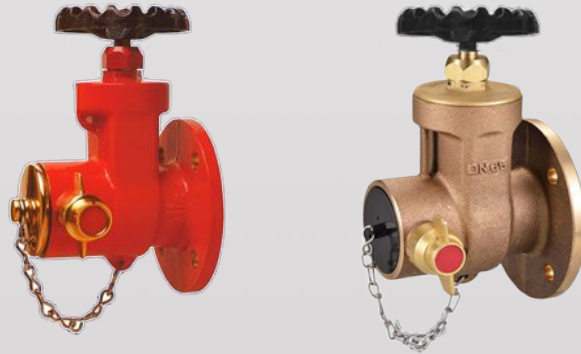

### Characteristics

Designed and constructed in accordance to BS 5041 Part 1. Valve body and internals designed for PN 20 bar working pressure. Pressure rating of individual valves is dependent on inlet and outlet connections. For use on dry riser systems.

### Material

Gun Metal to BS1400 Grade LG3.  
Red Paint finish available as an option.  
Cast Iron handwheel.

### Outlet

64mm Female Instantaneous to BS336.  
Other outlets available on request.  
Blanking Plug & Chain supplied as standard.

### Inlet Options

2 ½" BS10 Table D or 65mm NP16.

### Options

Steel Cabinets to house Landing Valves  
Manufactured in 1.5mm Powder Coated Zintec Steel  
Georgian wired Glass Inspection window  
Size: 420mm wide x 610mm high x 260mm deep

