


# Norlock Coupling & Adaptors

A Norwegian Hose Coupling System (16 Bar)

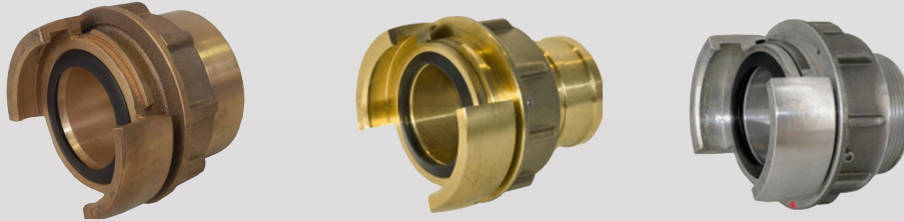

## Description

This is a two claw symmetrical hermaphrodite connection system for delivery applications only. Unlike other two claw systems the Norlock couplings and adaptors come with a locking ring device as standard.

## Options & Material

Hose Tails, BSP threaded adaptors and reducers.

Nor Las 1  
2 ½"

Nor Las 2  
2"

Nor Las 3  
1 ½"

Available in: Aluminium and Brass

## Washers and Wrenches

NBR Washers available for all Las connections.

Nor Las 1/2/3 Spanners can be supplied for the connection of couplings.



## Caps

PN16 caps are used to blank off a coupling. Caps come with a keep chain as standard.



Size	Hose Tail	BSP Female	BSP Male
Las 3	1"	1"	1"
	1 ¼"	1 - ¼"	1 ¼"
	1 ½"	1 - ½"	1 ½"
	1 ⅔"	2"	2"
Las 2	1 ½"	1"	1 ½"
	2"	1 - ½"	2"
		2"	
Las 1	1 ½"	1 - ½"	1 ½"
	2"	2"	2"
	2 ½"	2 - ½"	2 ½"
	3"	3	3"