

NOHA Special Fire Hose Reels




MODEL S41 FOR LONG HOSES

Our NOHA Special Model S41 for long hoses is a robust solution for fresh water use. For use in fire extinguishing and general cleaning and maintenance activities it can be wall or floor mounted. It has a hand crank to rewind the hose and the water supply is situated through the centre of the reel.



60 BAR HOSE REEL

Our NOHA Special fire hose reel is similar to the Model S41 but has special waterways making it suitable for use with working pressures up to 60 bar. It can be supplied with 10 mm, 13 mm or 19 mm diameter hose.

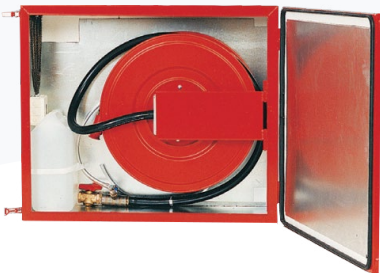

CORROSIVE ENVIRONMENT CABINET

Our NOHA hose reel with steel cabinet and 10 litre foam tank is the perfect cabinet-mounted hose reel for petrol stations and other corrosive environments. The swinging hose reel is combined with 3% foam inductor, fed from a 10-litre foam container with an action time of approximately 4 minutes.



HOSE REEL TUBING

Our replacement hose reel tubing is manufactured to EN 694:2001 standards and is suitable for use in fixed reel installations.

DIAMETER: 19mm or 25mm

LENGTH: 30 metre as standard

WORKING PRESSURE: 12 bar

TEMPERATURE RANGE: -20°C to +60°C

WALL THICKNESS: 19mm Tubing - 4mm, 25mm Tubing - 5mm