

Venom 2400 Portable Ground Monitor

The Venom 2400 Portable Ground Monitor has been designed to be light weight, extremely robust and low maintenance. With anti-skid tungsten steel spikes, the portable Ground Monitor gives excellent stability offering the user more accurate control. Very easy service and repair give you continued long service life.

FEATURES

Hard Anodized Aluminum construction.

Adjustable nozzle.

Available for straight jetting and fog spray.

20° swing left and right from the centre,
 30° - 80° elevate.


Easy to service and repair.

Light weight, less than 12kg.

Compatible with quick attach foam tube.



Technical Specification	
Weight	11.5kg (including the inlet coupling)
Materials	Body & Nozzle - Hard Anodized Aluminium Alloy Spike - Anti-Skidding Tungsten Steel Coupling - Aluminium Alloy
Working Pressure	Advised - 10 bar Max - 16 bar
Max Fog Angle	120°
Jetting Range	55m at 10 bar, 40 litres/sec
Flow Range	20 - 30 - 40 litres/sec, adjustable
Range of Monitor	20° swing left and right from centre, 30° - 80° elevate
Inlet	Instantaneous, Storz, NH, Rotta & Gost and many more
Outlet	2.5" Female NH

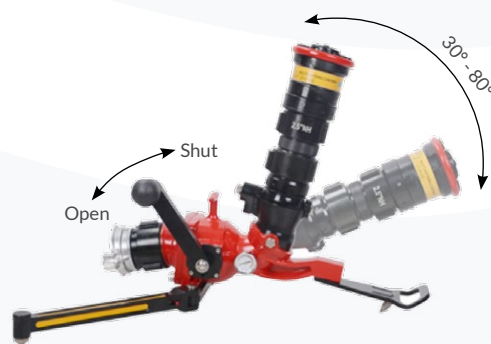

VENOM 2400 PORTABLE GROUND MONITOR OPERATION

